## Accessories



**Magnetic Lock** 12/24V DC. 1100 lb holding force. Secures the gate(s)

closed.



RLD-24 **Loop Detector** 

A safety device that stops the gate from closing on a vehicle.



**Chain Drop Box** 

Mechanical chain release fire box designed for use on sliding gates.



RAMSET Fire Box

Allows the fire department to open your gate in the case of an emergency.



**BBS-Battery Back-Up System** 

1000 lb capacity. Opens the gate when power is lost.



**Key Switch Box** 

Suitable for use on entry doors where access is restricted by a key.



**Thru-Wall Extension** 

Extends drive sprocket & idlers thru-wall. Keeps operator inside property/building.





**Post Mounts** 

1/4" angle iron flats. 3/16" square tubing legs. Used to mount the operator off the ground.



Premium **Guide Rollers** 

Heavy duty UHMW rollers. Lengths: 4", 6", 12" Colors: Black or White



Adjustable **Guide Rollers** 

Heavy duty UHMW rollers adjust to fit any gate. Lengths: 4", 6", 12"



RPI (Ramset Power Inverter)

Maintains power to your operator and accessories when the main power is lost. 750W output.



Goose Necks Square - 14 ga. Available in 48"

padmount or 66" in-ground. Used for mounting keypads, phone entry systems, card readers...etc.



7-Year Warranty Commercial



















**RAM 100** 

Residential Commercial



RAM 5500

Commercial Industrial



Designed to satisfy the need for gate operators in high traffic areas, such as residential gated communities, public storages, industrial parks and government facilities.

Commercial **Industrial** 

ON THE PROPERTY OF THE PROPERT

#### **SPECIFICATIONS**

**MAXIMUM GATE WEIGHT: 700 lbs** 

**MAXIMUM GATE TRAVEL: 20'** 

GATE TRAVELING SPEED: Approx. 1' per sec.

CYCLES: Continuous SHIPPING WEIGHT: 110 lbs

**OPERATING TEMPERATURE:** -10° F to 160° F

#### **Electric Motor**

1/2 Hp, 115 VAC 4.5 amp 50/60Hz. with high speed ball bearings and resettable overload button.

#### **Heavy Duty Worm Gear**

Lubricated in an oil bath for smooth and quiet operation.

#### **Limit Switches**

Mechanical adjustment for accurate gate stop settings.

#### Cover

High-impact resistant charcoal gray polyethylene.

#### **Cover Dimensions**

H: 22" L: 14 1/2" W: 15"

#### **Finish**

Gold/Zinc plated to inhibit corrosion.

# RAM 100 Residential / Commercial



**Emergency Foot Pedal Release** 

This mechanism disengages the gate from the operator to allow easy manual opening and closing of the gate during power outages and emergencies.

# RAM 1000 Commercial / Industrial



#### **Emergency Foot Pedal Release**

This mechanism disengages the gate from the operator to allow easy manual opening and closing of the gate during power outages and emergencies.

#### **SPECIFICATIONS**

**MAXIMUM GATE WEIGHT: 1000 lbs** 

**MAXIMUM GATE TRAVEL: 45**'

GATE TRAVELING SPEED: Approx. 1' per sec

CYCLES: Continuous. SHIPPING WEIGHT: 125 lbs

**OPERATING TEMPERATURE:** -10° F to 160° F

#### **Electric Motor**

1/2 Hp, 115 VAC. 4.5 amp. 50/60Hz. with high speed ball bearings and resettable overload button.

#### **Heavy Duty Worm Gear**

Lubricated in an oil bath for smooth and quiet operation.

#### **Limit Switches**

Mechanical adjustment for accurate gate stop settings.

#### Cover

High-impact resistant charcoal gray polyethylene.

#### **Cover Dimensions**

H: 27" L: 16" W: 16 1/2"

#### Finish

Gold/Zinc plated to inhibit corrosion.

#### **SPECIFICATIONS**

MAXIMUM GATE WEIGHT: 1500, 2500 lbs

**MAXIMUM GATE TRAVEL: 45'** 

GATE TRAVELING SPEED: Approx. 1' per sec

CYCLES: Continuous SHIPPING WEIGHT: 135 lbs

**OPERATING TEMPERATURE:** -10° F to 160° F

#### **Electric Motor**

3/4, 1 Hp - 115 VAC. - 8.5, 9.8 amp. 50/60Hz. with high speed ball bearings and resettable overload button.

#### **Heavy Duty Worm Gear**

Lubricated in an oil bath for smooth and quiet operation.

#### **Limit Switches**

Mechanical adjustment for accurate gate stop settings.

#### Cover

High-impact resistant charcoal gray polyethylene.

#### **Cover Dimensions**

H: 27" L: 16" W: 16 1/2"

#### Finish

Gold/Zinc plated to inhibit corrosion.

### **RAM 5500**

Commercial / Industrial




#### **Emergency Foot Pedal Release**

This mechanism disengages the gate from the operator to allow easy manual opening and closing of the gate during power outages and emergencies.

### RAMSET "Intelligate" Control Board

UL 325 2016 Edition 6

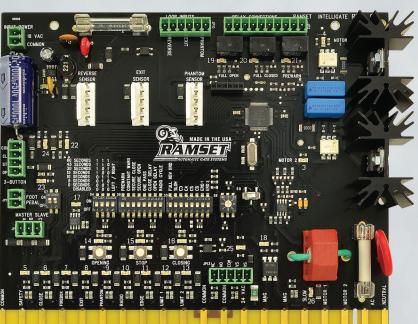

The Intelligate control board is the most advanced gate controller in the industry, putting Ramset ahead of the competition when it comes to reliability and number of features. It is controlled by a programmable microprocessor that reads and precisely executes all functions of the control board. Some of the features of the control board:

- \* Automatic close timer
- \* Pre warning alarm relays
- \* Constant warning alarm relays
- \* Manual or self adjusting ERD
- \* Dual gate communication capability
- \* Secure close
- \* Anti-tailgating/One pass system
- \* Radio cycle (open, stop & close)
- \* Open & close delays
- \* Indicator lights for easy troubleshooting
- \* Plug in loop detectors
- \* Left/Right installation switch